

A Filter for the Circuit Constraint

Latife Genç Kaya and J.N. Hooker

Tepper School of Business, Carnegie Mellon University, Pittsburgh, USA
lgenc@andrew.cmu.edu, john@hooker.tepper.cmu.edu

Abstract. We present an incomplete filtering algorithm for the circuit constraint. The filter removes redundant values by eliminating nonhamiltonian edges from the associated graph. We identify nonhamiltonian edges by analyzing a smaller graph with labeled edges that is defined on a separator of the original graph. The complexity of the procedure for each separator S is approximately $O(|S|^5)$. We found that it identified all infeasible instances and eliminated about one-third of the redundant domain elements in feasible instances.

The circuit constraint can be written

$$\text{circuit}(x_1, \dots, x_n)$$

where the domain of each x_i is $D_i \subset \{1, \dots, n\}$. The constraint requires that y_1, \dots, y_n be a cyclic permutation of $1, \dots, n$, where

$$\begin{aligned} y_{i+1} &= x_{y_i}, \quad i = 1, \dots, n-1 \\ y_1 &= x_{y_n} \end{aligned}$$

Let directed graph G contain an edge (i, j) if and only if j belongs to the domain of x_i . If edge (i, j) is selected when $x_i = j$, the circuit constraint requires that the selected edges form a hamiltonian circuit or *tour* of G .

One approach to filtering the circuit constraint is to make use of necessary conditions for hamiltonicity of G . Chvátal [2, 3] analyzes several conditions, one of which (*1-toughness*) is a very restricted case of a condition we develop for filtering nonhamiltonian edges.

Some elementary techniques for filtering domains after a partial tour has been constructed are described by Shufelt and Berliner [4], whose analysis relies on the special structure of a chessboard problem, and Caseau and Laburthe [1], who solve small traveling salesman problems. Neither approach is intended for the general filtering problem in which arbitrary variable domains are given.

1 Separator Graph

Given a graph $G = (V, E)$, a set of vertices $S \subset V$ is a (vertex) *separator* of G if $V \setminus S$ induces a subgraph \bar{G}_S of G with at least two connected components C_1, \dots, C_p . The *separator graph* G_S for a separator S of G consists of a directed

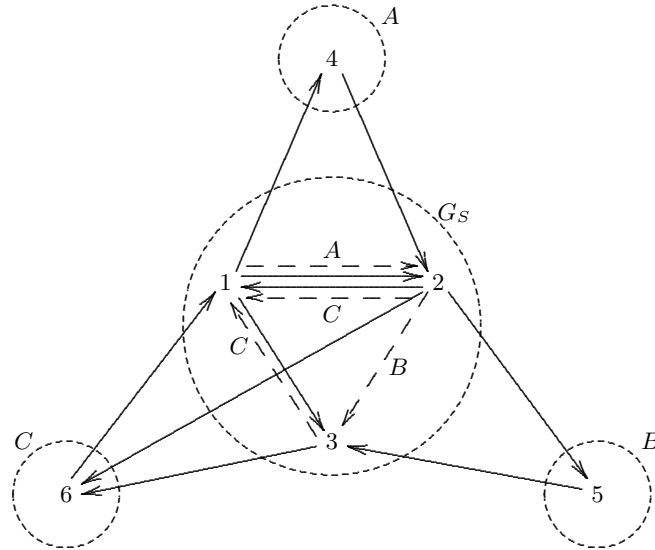


Fig. 1. Graph G on vertices $\{1, \dots, 6\}$ contains the solid edges, and the separator graph G_S on $S = \{1, 2, 3\}$ contains the solid (unlabeled) edges and dashed (labeled) edges within the larger circle. The small circles surround connected components of the separated graph.

graph with vertex set S and edge set E_S , along with a set L_S of labels corresponding to the connected components of \tilde{G}_S . E_S contains (a) an unlabeled edge (i, j) for each $(i, j) \in E$, as well as (b) a labeled edge $(i, j)^C$ whenever $C \in L_S$ and $(i, c_1), (c_2, j) \in E$ for some pair of vertices c_1, c_2 in connected component C (possibly $c_1 = c_2$ and c_1 and c_2 need not be connected by an edge).

Consider for example the graph G of Fig. 1. Vertex set $S = \{1, 2, 3\}$ separates G into three connected components that may be labeled A, B and C , each of which contains only one vertex. Thus $L_S = \{A, B, C\}$, and the separator graph G_S contains the three edges that connect its vertices in G plus four labeled edges. For example, there is an edge $(1, 2)$ labeled A , which can be denoted $(1, 2)^A$, because there is a directed path from some vertex in component A through $(1, 2)$ and back to a vertex of component A .

A hamiltonian cycle of G_S is *permissible* if it contains at least one edge bearing each label in L_S . An edge of G_S is *permissible* if it is part of some permissible hamiltonian cycle of G_S . Thus the edges $(1, 2)^A$, $(2, 3)^B$ and $(3, 1)^C$ form a permissible hamiltonian cycle in Fig. 1, and they are the only permissible edges.

Theorem 1. *If S is a separator of directed graph G , then G is hamiltonian only if G_S contains a permissible hamiltonian cycle. Furthermore, an edge of G connecting vertices in S is hamiltonian only if it is a permissible edge of G_S .*

Proof. Consider an arbitrary hamiltonian cycle H of G . We can construct a permissible hamiltonian cycle H_S for G_S as follows. Consider the sequence of vertices

in H and remove those that are not in S ; let i_1, \dots, i_m, i_1 be the remaining sequence of vertices. H_S can be constructed on these vertices as follows. For any pair i_k, i_{k+1} (where i_{m+1} is identified with i_1), if they are adjacent in H then (i_k, i_{k+1}) is an unlabeled edge of G_S and connects i_k and i_{k+1} in H_S . If i_k, i_{k+1} are not adjacent in H then all vertices in H between i_k and i_{k+1} lie in the same connected component C of the subgraph of G induced by $V \setminus S$. This means (i_k, i_{k+1}) is an edge of G_S with label C , and $(i_k, i_{k+1})^C$ connects i_k and i_{k+1} in H_S . Since H passes through all connected components, every label must occur on some edge of H_S , and H_S is permissible.

We now show that if (i, j) with $i, j \in S$ is an edge of a hamiltonian cycle H of G , then (i, j) is an edge of a permissible hamiltonian cycle of G_S . But in this case (i, j) is an unlabeled edge of G_S , and by the above construction (i, j) is part of H_S .

Corollary 1. *If $|L_S| > |S|$ for some separator S , then G is nonhamiltonian.*

Proof. The separator graph G_S has $|S|$ vertices and therefore cannot have a hamiltonian cycle with more than $|S|$ edges.

If $|L_S| \leq |S|$ for all separators S , G is *1-tough*, adapting Chvátal's term [3] to directed graphs.

Corollary 2. *If $|L_S| = |S|$ for some separator S , then no edge connecting vertices of S is hamiltonian.*

Proof. An edge e that connects vertices in S is unlabeled in G_S . If e is hamiltonian, some hamiltonian cycle in G_S that contains e must have at least $|S|$ labeled edges. But since the cycle must have exactly $|S|$ edges, all the edges must be labeled and none can be identical to e .

2 Finding Separators

We use a straightforward breadth-first-search heuristic to find separators of G . We arrange the vertices of G in levels as follows. Arbitrarily select a vertex i of G as a *seed* and let level 0 contain i alone. Let level 1 contain all neighbors of i in G . Let level k (for $k \geq 2$) contain all vertices j of G such that (a) j is a neighbor of some vertex on level $k - 1$, and (b) j does not occur in levels 0 through $k - 1$. If maximum level $m \geq 2$, the vertices on any given level k ($0 < k < m$) form a separator of G . Thus the heuristic yields $m - 1$ separators.

The heuristic can be run several times as desired, each time beginning with a different vertex on level 0.

3 Cardinality Filter and Vertex Degree Filtering

The next step of the algorithm is to identify nonpermissible edges of G_S for each separator S by a relaxation of the permissibility condition.

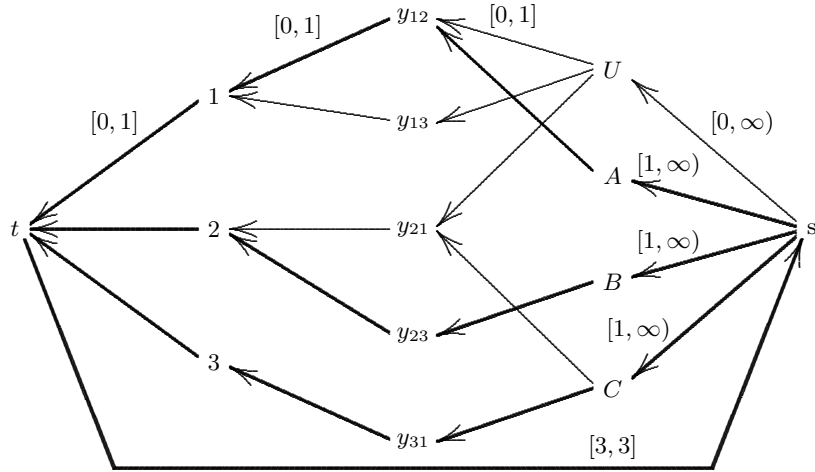


Fig. 2. Flow model for simultaneous gcc and out-degree filtering of nonhamiltonian edges. Heavy lines show the only feasible flow.

Let Y contain a variable y_{ij} for each *ordered* pair of vertices i, j in G_S . The domain of y_{ij} contains label C for each edge $(i, j)^C$ in G_S and the element U if unlabeled edge (i, j) is in G_S . A permissible hamiltonian cycle must satisfy the constraint

$$\text{gcc}(Y, (C_1, \dots, C_p, U), (1, \dots, 1, 0), (\infty, \dots, \infty)) \tag{1}$$

Vertex degree filtering is based on the fact that the in-degree and out-degree of every vertex in a hamiltonian cycle is one. Constraint (1) can be combined with out-degree filtering by constructing a capacitated flow graph G_S^{out} with the following vertices

- source s and sink t
- U and C_1, \dots, C_p
- a vertex for each $y_{ij} \in Y$
- a vertex for every vertex of G_S

and the following directed edges

- (s, C_i) with capacity range $[1, \infty)$ for $i = 1, \dots, p$
- (s, U) with capacity range $[0, \infty)$
- (C, y_{ij}) with capacity range $[0, 1]$ for every edge $(i, j)^C \in E_S$
- (U, y_{ij}) with capacity range $[0, 1]$ for every unlabeled edge $(i, j) \in E_S$
- (y_{ij}, i) with capacity range $[0, 1]$ for every ordered pair (i, j) such that (i, j) or $(i, j)^C$ belongs to E_S
- (i, t) with capacity range $[0, 1]$ for every vertex i of G_S
- return edge (t, s) with capacity range $[|S|, |S|]$

The gcc and out-degree constraints are simultaneously satisfiable if and only if G_S^{out} has a feasible flow. The same is true of the graph G_S^{in} constructed in an analogous way to enforce in-degree constraints. Thus

Let G be the directed graph associated with $\text{circuit}(x_1, \dots, x_n)$.

Let D_i be the current domain of x_i for $i = 1, \dots, n$.

Let s be a limit on the size of separators considered.

For one or more vertices i of G :

Use the breadth-first-search heuristic to create a collection \mathcal{S} of separators, with i as the seed.

For each $S \in \mathcal{S}$ with $|S| \leq s$:

For $G'_S = G_S^{\text{out}}, G_S^{\text{in}}$:

If G'_S has a feasible flow f then:

For each edge (U, y_{ij}) of G'_S on which f places zero flow:

If there is no augmenting path from y_{ij} to U then delete j from D_i .

Else stop; $\text{circuit}(x_1, \dots, x_n)$ is infeasible.

Fig. 3. Filtering algorithm for the circuit constraint

Theorem 2. *An edge (i, j) of G is nonhamiltonian if there is a separator S of G for which the maximum flow on arc (U, y_{ij}) of either G_S^{out} or G_S^{in} is zero.*

This can be checked by first computing a feasible flow f on G_S^{out} and on G_S^{in} . The maximum flow on (U, y_{ij}) is zero if (a) f places zero flow on (U, y_{ij}) , and (b) there is no augmenting path from y_{ij} to U .

For example, the network G_S^{out} for the graph G and separator S of Fig. 1 is shown in Fig. 2. Since the flow of zero on edges (U, y_{12}) , (U, y_{13}) and (U, y_{21}) is maximum in each case, the three edges $(1, 2)$, $(1, 3)$, and $(2, 1)$ are nonhamiltonian.

4 The Algorithm and Computational Results

The filtering algorithm (Fig. 3) has complexity of approximately $O(|S|^5)$ for each separator S . In preliminary computational tests on several thousand random graphs with up to 15 vertices, we detected all nonhamiltonian graphs and eliminated about 1/3 of nonhamiltonian edges in hamiltonian graphs.

References

1. Y. Caseau and F. Laburthe. Solving small TSPs with constraints. In L. Naish, editor, *Proceedings, Fourteenth International Conference on Logic Programming (ICLP 1997)*, volume 2833, pages 316–330. The MIT Press, 1997.
2. V. Chvátal. Edmonds polytopes and weakly hamiltonian graphs. *Mathematical Programming*, 5:29–40, 1973.
3. V. Chvátal. Tough graphs and hamiltonian circuits. *Discrete Mathematics*, 5:215–228, 1973.
4. J. Shufelt and H. Berliner. Generating hamiltonian circuits without backtracking from errors. *Theoretical Computer Science*, 132:347–375, 1994.